



VITE "AF" Ø 4,8

Fissaggio su lamiera.

Spessore del pannello di isolamento + minimo 20 mm.

VITE AUTOFILETTANTE

Rivestimento argentato. Minimo 15 cicli secondo il test di Kesternich. In accordo con le normative DIN 50018 S2,OL.

Capacità di foratura 0,88 mm. Marchiatura EF.

Testa a trombetta-Impronta Philips N. 2

"AF" SCREW Ø 4,8

Fixing on metal sheets.

Thickness of the insulating panel + at least 20 mm.

SELF-THREADING SCREW


Silver coating. At least 15 cycles based on the Kesternich test. Complies with DIN 50018 S2, OL regulations.

Drilling capacity 0.88 mm. EF marking.

Bugle head Philips pattern no. 2

Vite "AF" autofilettante per coperture / "AF" Self-threading roofings screw

	Codice Code	Denominazione commerciale Name	A mm	B mm	C mm	Spessore Fissabile mm Fixable thickness mm	Conf/pz Pcs/box
1	680-100-048-030	"AF" 4,8x30	4,8	8,5	30	10	1000
2	680-100-048-080	"AF" 4,8x80	4,8	8,5	80	60	500
3	680-100-048-090	"AF" 4,8x90	4,8	8,5	90	70	500
4	680-100-048-100	"AF" 4,8x100	4,8	8,5	100	80	500
5	680-100-048-110	"AF" 4,8x110	4,8	8,5	110	90	500
6	680-100-048-120	"AF" 4,8x120	4,8	8,5	120	100	500
7	680-100-048-130	"AF" 4,8x130	4,8	8,5	130	110	500
8	680-100-048-140	"AF" 4,8x140	4,8	8,5	140	120	500
9	680-100-048-170	"AF" 4,8x170	4,8	8,5	170	150	500

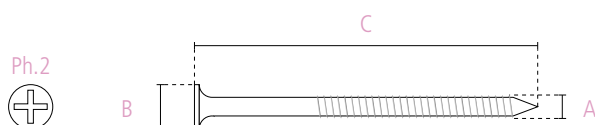

VITE AUTOPERFORANTE PER COPERTURE TESTA A TROMBETTA SELF-DRILLING ROOFINGS SCREW WITH BUGLE HEAD

FISSAGGI
FIXINGS



VITE "PH-TP" Ø 4,8

Fissaggio su lamiera.

Spessore del pannello di isolamento + minimo 20 mm.

VITE AUTOPERFORANTE

Rivestimento argentato. Minimo 15 cicli secondo il test di Kesternich. In accordo con le normative DIN 50018 S2,OL.

Capacità di foratura 2x1,25 mm. Marchiatura EF.

Testa a trombetta - Impronta Philips N. 2.

"PH-TP" SCREW Ø 4,8

Fixing on metal sheets.

Thickness of the insulating panel + at least 20 mm.

SELF-DRILLING SCREW


Silver coating. At least 15 cycles based on the Kesternich test. Complies with DIN 50018 S2, OL regulations.

Drilling capacity 2x1.25 mm. EF marking.

Bugle head - Philips pattern no. 2.

Vite "PH-TP" auto perforante per coperture / "PH-TP" Self-drilling roofings screw with bugle head

	Codice Code	Denominazione commerciale Name	A mm	B mm	C mm	Spessore Fissabile mm Fixable thickness mm	Conf/pz Pcs/box
1	680-150-048-090	"PH-TP" 4,8x90	4,8	8,9	90	70	1000
2	680-150-048-100	"PH-TP" 4,8x100	4,8	8,9	100	80	500
3	680-150-048-110	"PH-TP" 4,8x110	4,8	8,9	110	90	500





Vite "PH-TB" Ø 5,5

Fissaggio su lamiere: spessore del pannello di isolamento + minimo 20 mm.

Fissaggio su legno: spessore del pannello di isolamento + lo spessore del legno.

VITE AUTOPERFORANTE

Rivestimento CR10. Minimo 30 cicli secondo il test di Kesternich. In accordo con le normative DIN 50018 S2,OL.

Capacità di foratura 2x1,25 mm. Marchiatura FM.

Testa bombata - impronta Philips N.3.

"PH-TB" screw "PH-TB" Ø 5,5

Fixing on metal sheets: insulating panel thickness + at least 20 mm.

Fixing on wood: insulating panel thickness + thickness of the wood.

SELF-PERFORATING SCREW


CR10 coating. At least 30 cycles based on the Kesternich test. Complies with DIN 50018 S2, OL regulations.

Drilling capacity 2x1.25 mm. FM marking.

Truss head - Philips pattern no.3.

Vite "PH-TB" autoperforante per coperture / "PH-TB" self-drilling roofings screw

	Codice Code	Denominazione commerciale Name	A mm	B mm	C mm	Spessore Fissabile mm Fixable thickness mm	Conf/pz Pcs/box
1	680-350-055-041	"PH-TB" 5,5x41	5,5	11,2	41	21	1000
2	680-350-055-055	"PH-TB" 5,5x55	5,5	11,2	55	35	1000
3	680-350-055-073	"PH-TB" 5,5x73	5,5	11,2	73	53	1000
4	680-350-055-083	"PH-TB" 5,5x83	5,5	11,2	83	63	1000
5	680-350-055-095	"PH-TB" 5,5x95	5,5	11,2	95	75	1000
6	680-350-055-114	"PH-TB" 5,5x114	5,5	11,2	114	94	1000
7	680-350-055-127	"PH-TB" 5,5x127	5,5	11,2	127	107	1000
8	680-350-055-152	"PH-TB" 5,5x152	5,5	11,2	152	132	1000
9	680-350-055-178	"PH-TB" 5,5x178	5,5	11,2	178	158	1000
10	680-350-055-203	"PH-TB" 5,5x203	5,5	11,2	203	183	1000

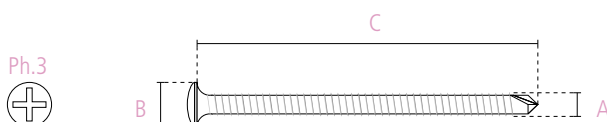



VITE "HD" Ø 6,3

Fissaggio universale.

Fissaggio su lamiera: spessore lamiera forabile senza pre foro 2x1,25; spessore del pannello di isolamento + minimo 20 mm.

Fissaggio su legno: spessore del pannello di isolamento + lo spessore del legno.

Fissaggio su calcestruzzo alleggerito: spessore del pannello di isolamento + minimo 55 mm.

Fissaggio su calcestruzzo: spessore del pannello di isolamento + minimo 25 mm pre-forato da Ø 5 o 5,5 mm.

VITE UNIVERSALE "HD"

Punta RICOH. Testa a goccia Torx25.

Rivestimento argentato.

Minimo 15 cicli secondo il test di Kesternich.

In accordo con le normative DIN 50018 S2,OL.

"HD" SCREW Ø 6,3

Universal fixing.

Fixing on metal sheet: thickness of the drillable metal sheet without pre-hole 2x1.25, thickness of the insulating panel + at least 20 mm.

Fixing on wood: insulating panel thickness + thickness of the wood.

Fixing on lightened concrete: insulation panel thickness + at least 55 mm.

Fixing on concrete: insulating panel thickness + at least 25 mm, with a Ø 5 or 5.5 mm pre-drilled.

"HD" UNIVERSAL SCREW

RICOH tip. Torx25 truss head.


Silver coating.

At least 15 cycles based on the Kesternich test.

In accordance with DIN 50018 S2, OL regulations.

Vite "HD" per coperture / "HD" roofings screw

	Codice Code	Denominazione commerciale Name	A mm	B mm	C mm	Conf/pz Pcs/box
1	680-500-063-060	Universal "HD" 6,3x60	6,3	9	60	500
2	680-500-063-070	Universal "HD" 6,3x70	6,3	9	70	500
3	680-500-063-080	Universal "HD" 6,3x80	6,3	9	80	500
4	680-500-063-100	Universal "HD" 6,3x100	6,3	9	100	500
5	680-500-063-130	Universal "HD" 6,3x130	6,3	9	130	500
6	680-500-063-160	Universal "HD" 6,3x160	6,3	9	160	500
7	680-500-063-200	Universal "HD" 6,3x200	6,3	9	200	500
8	680-500-063-230	Universal "HD" 6,3x230	6,3	9	230	500
9	680-500-063-250	Universal "HD" 6,3x250	6,3	9	250	500
10	680-500-063-300	Universal "HD" 6,3x300	6,3	9	300	500

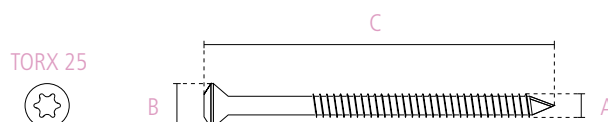



VITE "CS" Ø 6,3

Fissaggio su calcestruzzo.

Fissaggio su calcestruzzo: spessore del pannello di isolamento + minimo 25 mm di inserimento nel calcestruzzo.

Pre-forato da Ø 5 o 5,5 mm.

VITE PER CALCESTRUZZO

Rivestimento CR10.

Minimo 30 cicli secondo il test di Kesternich.

In accordo con le normative DIN 50018 S2, OL.

Testa esagonale con bordo "AF" 8 mm.

"CS" SCREW Ø 6,3

Fixing on concrete.

Fixing on concrete: insulating panel thickness + insertion at least 25 mm deep into the concrete.

Pre-drilled with a Ø 5 or 5.5 mm.

SCREW FOR CONCRETE

CR10 coating.


At least 30 cycles based on the Kesternich test.

Complies with DIN 50018 S2, OL regulations.

Hexagonal head with "AF" edge, 8 mm.

Vite "CS" per calcestruzzo / "CS" screw for concrete

	Codice Code	Denominazione commerciale Name	A mm	B mm	C mm	Conf/pz Pcs/box
1	680-400-063-032	"CS" 6,3x32	6,3	10,6	32	1000
2	680-400-063-043	"CS" 6,3x43	6,3	10,6	43	1000
3	680-400-063-094	"CS" 6,3x94	6,3	10,6	94	1000

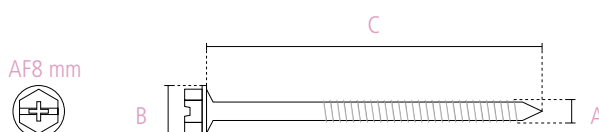

CHiodo "SC" IN ACCIAIO INOX PER CALCESTRUZZO STAINLESS STEEL SC NAIL FOR CONCRETE

FISSAGGI
FIXINGS



CHiodo "SC" Ø 5,5
Fissaggio su calcestruzzo.

CHiodo "SC"
Spessore del pannello di isolamento + minimo 25 mm d'inserimento sul calcestruzzo.
Pre-foro da 5 mm con profondità minima da 40 mm.

"SC" NAIL SC Ø 5,5
Fixing on concrete

"SC" NAIL
Thickness of the insulating panel + insertion at least 25 mm deep into the concrete.
5.0 mm pre-hole with a minimum depth of 40 mm.

Chiodo "SC" in acciaio inox per calcestruzzo / Stainless steel "SC" nail for concrete

	Codice Code	Denominazione commerciale Name	A mm	B mm	C mm	Spessore Fiss.le mm Fixable thickness	Conf/pz Pcs/box
1	680-300-055-045	Chiodo / nail SC 5,5x45	5,5	9,8	45	20	500
2	680-300-055-055	Chiodo / nail SC 5,5x55	5,5	9,8	55	30	500

