


Magic Box® Hydra singolo



INTONACO SINGLE FOR SOLID WALLS

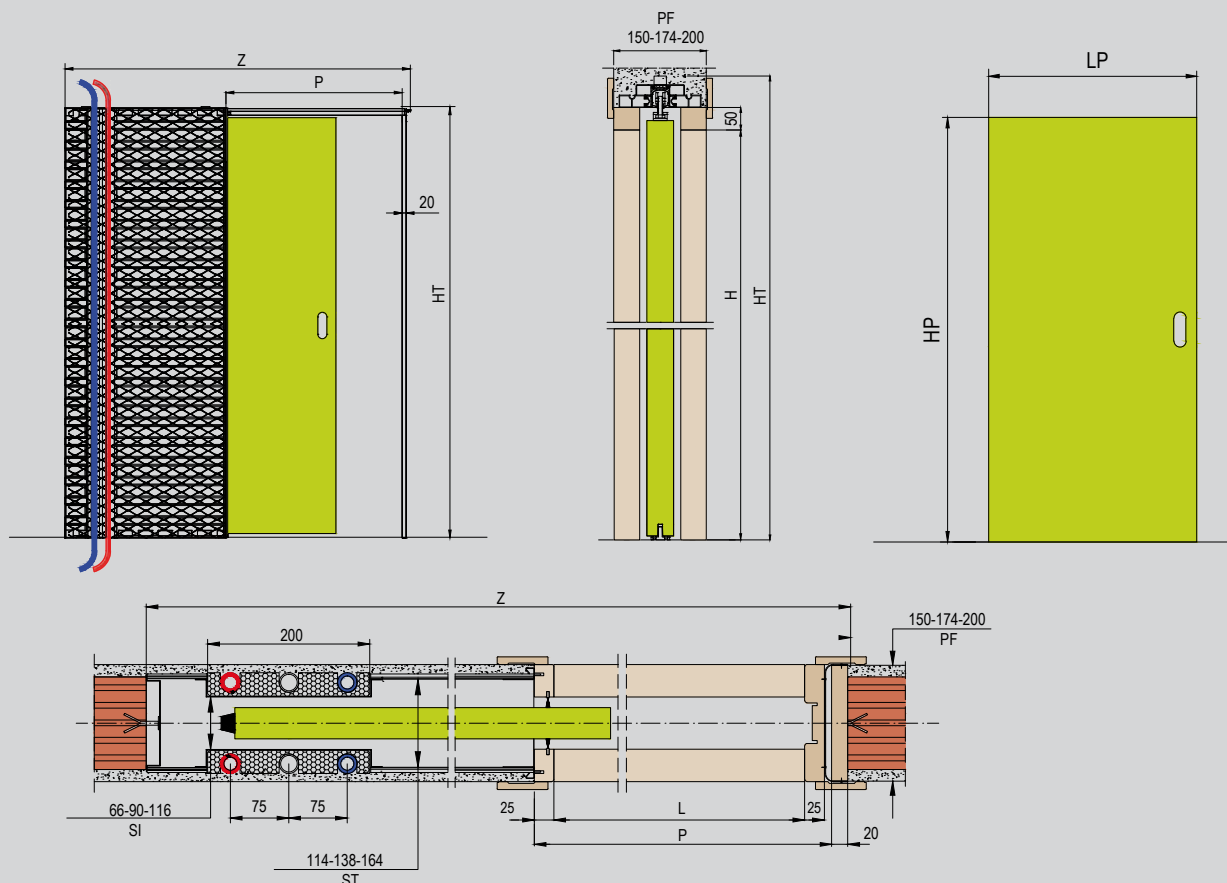

STANDARD

misure in mm - sizes in mm

L x H	Z	HT	P	ST	PF	LP x HP
600 x 2000/2030/2100	1330	2100/2140/2200	655	114/138/164	150/174/200	615÷630 x 2010/2040/2110
700 x 2000/2030/2100	1530	2100/2140/2200	755	114/138/164	150/174/200	715÷730 x 2010/2040/2110
800 x 2000/2030/2100	1730	2100/2140/2200	855	114/138/164	150/174/200	815÷830 x 2010/2040/2110
900 x 2000/2030/2100	1930	2100/2140/2200	955	114/138/164	150/174/200	915÷930 x 2010/2040/2110
1000 x 2000/2030/2100	2130	2100/2140/2200	1055	114/138/164	150/174/200	1015÷1030 x 2010/2040/2110
1100 x 2000/2030/2100	2330	2100/2140/2200	1155	114/138/164	150/174/200	1115÷1130 x 2010/2040/2110
1200 x 2000/2030/2100	2530	2100/2140/2200	1255	114/138/164	150/174/200	1215÷1230 x 2010/2040/2110

NOTE TECNICHE

A richiesta sono disponibili altri controtelai a misura speciale con larghezze (L) a partire da 500 mm fino a 1500 mm ed altezze (H) a partire da 500 mm fino a 3000 mm.

Le misure intermedie in L e H del controtelaio variano di 50 mm.

Per il controtelaio con struttura (ST) da 114 mm è consigliabile l'utilizzo di pannelli porta con spessore max (SP) di 43 mm, compresi eventuali cornici fermavetro.

È possibile inserire fino a nr 3 tubi idraulici per lato con Ø max di 1" compreso isolamento.

Le predisposizioni idro-termo-sanitarie sono presenti su entrambi i lati del controtelaio.

Portata standard dei carrelli in dotazione: 120 kg.

TECHNICAL INFORMATION

Special systems can be produced on demand with the width (L) starting from 500 mm up to 1500 mm, and height (H) from 500 mm up to 3000 mm. Intermediate sizes L and H are available in increments of 50 mm.

Systems with 114 mm structure (ST) are suitable for doors up to 43 mm thick (SP), including panel arch top door.

It is possible to host on each side of the frame up to n.3 plumbings with Ø max of 1" insulation included.

The settings for the plumbing system are on both sides of the frame.

Standard payload of the hanging kit supplied: 120 kg.