


## Bigfoot® America singolo

### CARTONGESSO SINGLE FOR PLASTERBOARD WALLS

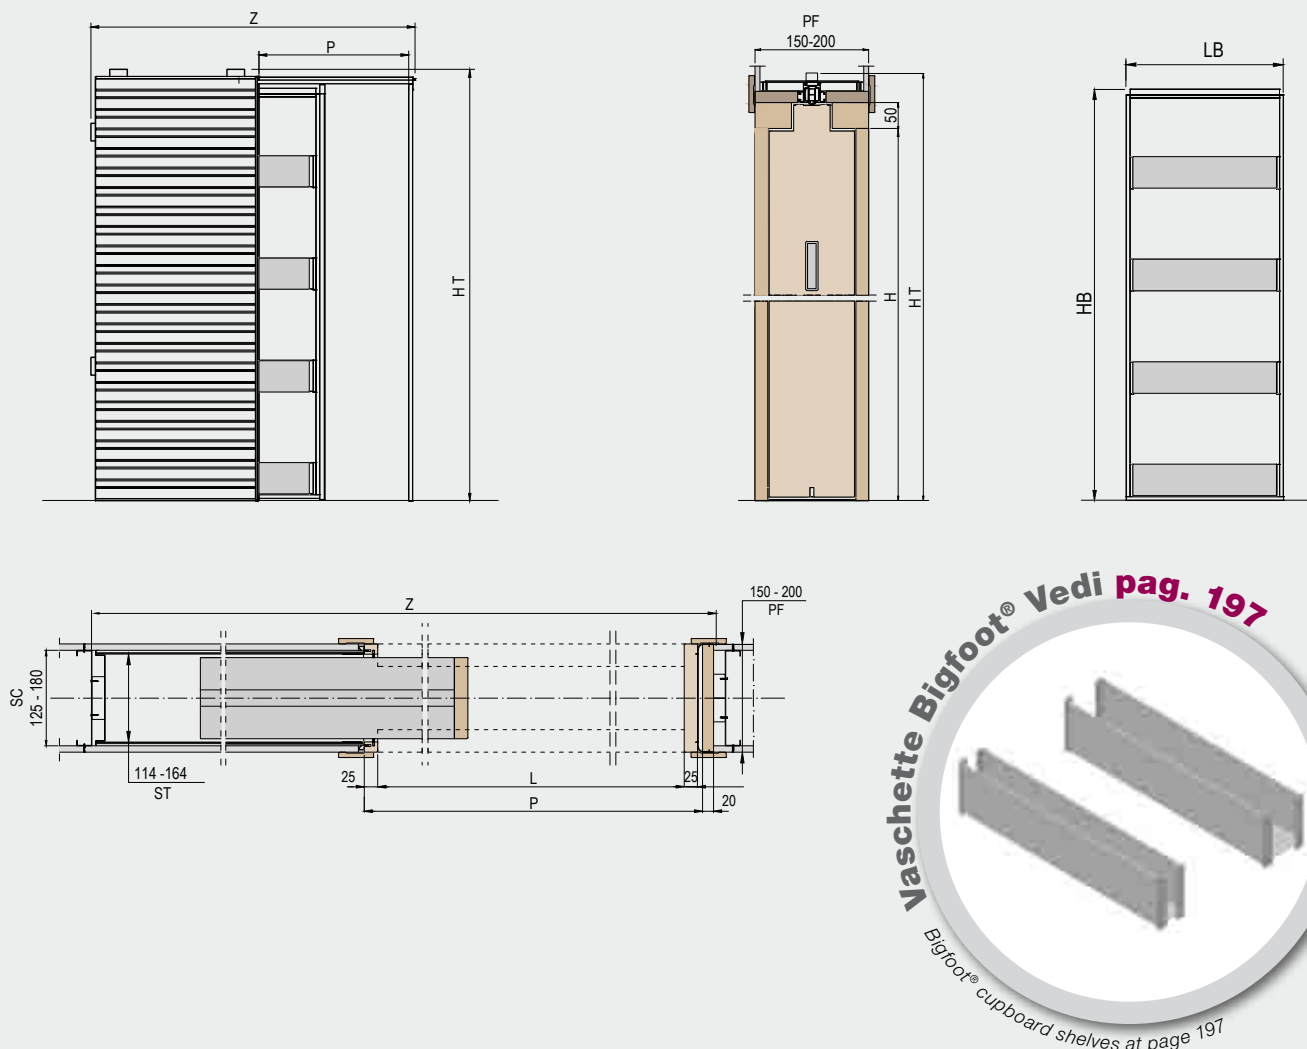

#### STANDARD

misure in mm - sizes in mm

| L x H                 | Z    | HT             | P    | ST      | SC      | PF      | LB x HB             |
|-----------------------|------|----------------|------|---------|---------|---------|---------------------|
| 600 x 2000/2030/2100  | 1330 | 2100/2140/2200 | 655  | 114/164 | 125/180 | 150/200 | 605x2015/2040/2115  |
| 700 x 2000/2030/2100  | 1530 | 2100/2140/2200 | 755  | 114/164 | 125/180 | 150/200 | 705x2015/2040/2115  |
| 800 x 2000/2030/2100  | 1730 | 2100/2140/2200 | 855  | 114/164 | 125/180 | 150/200 | 805x2015/2040/2115  |
| 900 x 2000/2030/2100  | 1930 | 2100/2140/2200 | 955  | 114/164 | 125/180 | 150/200 | 905x2015/2040/2115  |
| 1000 x 2000/2030/2100 | 2130 | 2100/2140/2200 | 1055 | 114/164 | 125/180 | 150/200 | 1005x2015/2040/2115 |

#### NOTE TECNICHE

A richiesta sono disponibili oltre alle misure in tabella altre dimensioni di controtelai (L x H) e contenitore (LB x HB).

È possibile, in alcune combinazioni, avere la luce di passaggio (L) maggiore della larghezza del contenitore (LB).

Per fattibilità chiedere in azienda.

Le misure intermedie in L e H del controtelaio e contenitore variano di 50 mm.

Contenitore bianco RAL 9010.

Per il fissaggio della lastra in cartongesso sul controtelaio utilizzare le viti in dotazione (o comunque viti di lunghezza non superiore a 19 mm), forando in corrispondenza delle doghe di rinforzo del controtelaio.

Si consiglia l'utilizzo di lastre in cartongesso di spessore 12,5 mm.

#### TECHNICAL INFORMATION

Other pocket frame measurements (L x H) and storage cupboards (LB x HB) are available on demand, beside the ones indicated in the schedule.

With some combinations it is possible to have the doorway bigger than the width (LB) of the storage cupboard.

Please contact our company to ask for feasibility.

Intermediate sizes L and H are available in increments of 50 mm.

White storage cupboard RAL 9010.

The screws supplied with the system are suitable for the 12,5 mm plaster board. The drilled have to be made in correspondance to the reinforcing boards of the pocket frame.

Only screws less than 19 mm should be used with 12,5 mm plaster board.

It is advisable to use plaster boards of 12,5 mm thick.