


Bigfoot® + Standard

INTONACO FOR SOLID WALLS

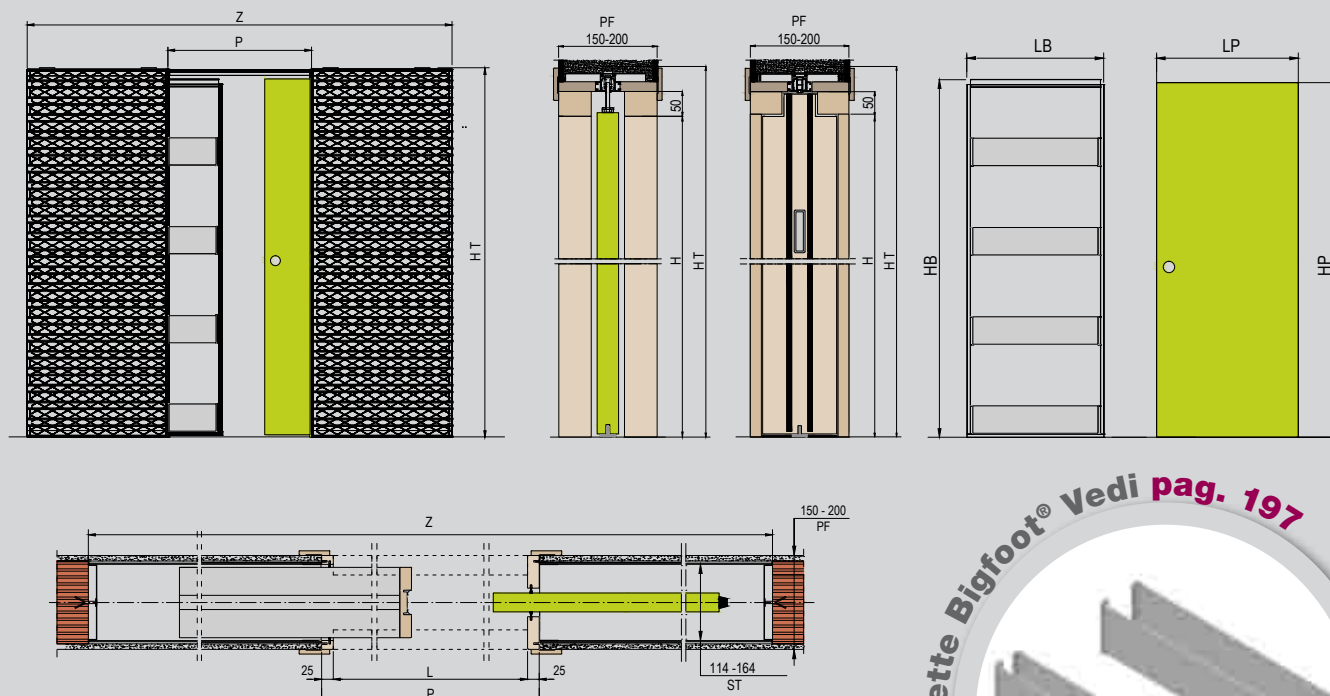

STANDARD

misure in mm - sizes in mm

L x H	Z	HT	P	ST	PF	LB x HB	LP x HP
600 x 2000/2030/2100	1930	2100/2140/2200	650	114/164	150/200	605x2015/2040/2115	615÷630 x 2010/2040/2110
700 x 2000/2030/2100	2230	2100/2140/2200	750	114/164	150/200	705x2015/2040/2115	715÷730 x 2010/2040/2110
800 x 2000/2030/2100	2530	2100/2140/2200	850	114/164	150/200	805x2015/2040/2115	815÷830 x 2010/2040/2110
900 x 2000/2030/2100	2830	2100/2140/2200	950	114/164	150/200	905x2015/2040/2115	915÷930 x 2010/2040/2110
1000 x 2000/2030/2100	3130	2100/2140/2200	1050	114/164	150/200	1005x2015/2040/2115	1015÷1030 x 2010/2040/2110

NOTE TECNICHE

A richiesta sono disponibili oltre alle misure in tabella altre dimensioni di controtelai (L x H) e contenitore (LB x HB).

È possibile, in alcune combinazioni, avere la luce di passaggio (L) maggiore della larghezza del contenitore (LB).

Per fattibilità chiedere in azienda.

Le misure intermedie in L e H del controtelaio e contenitore variano di 50 mm.

Contenitore bianco RAL 9010.

Per il controtelaio con struttura (ST) da 114 mm è consigliabile l'utilizzo di pannelli porta con spessore max (SP) di 43 mm, compresi eventuali cornici fermavetro.

TECHNICAL INFORMATION

Other pocket frame measurements (L x H) and storage cupboards (LB x HB) are available on demand, beside the ones indicated in the schedule.

With some combinations it is possible to have the doorway bigger than the width (LB) of the storage cupboard.

Please contact our company to ask for feasibility.

Intermediate sizes L and H are available in increments of 50 mm.

White storage cupboard RAL 9010.

Systems with 114 mm structure (ST) are suitable for doors up to 43 mm thick (SP), including panel arch top door.