


Bilaterale

CARTONGESSO BI-LATERAL FOR PLASTERBOARD WALLS

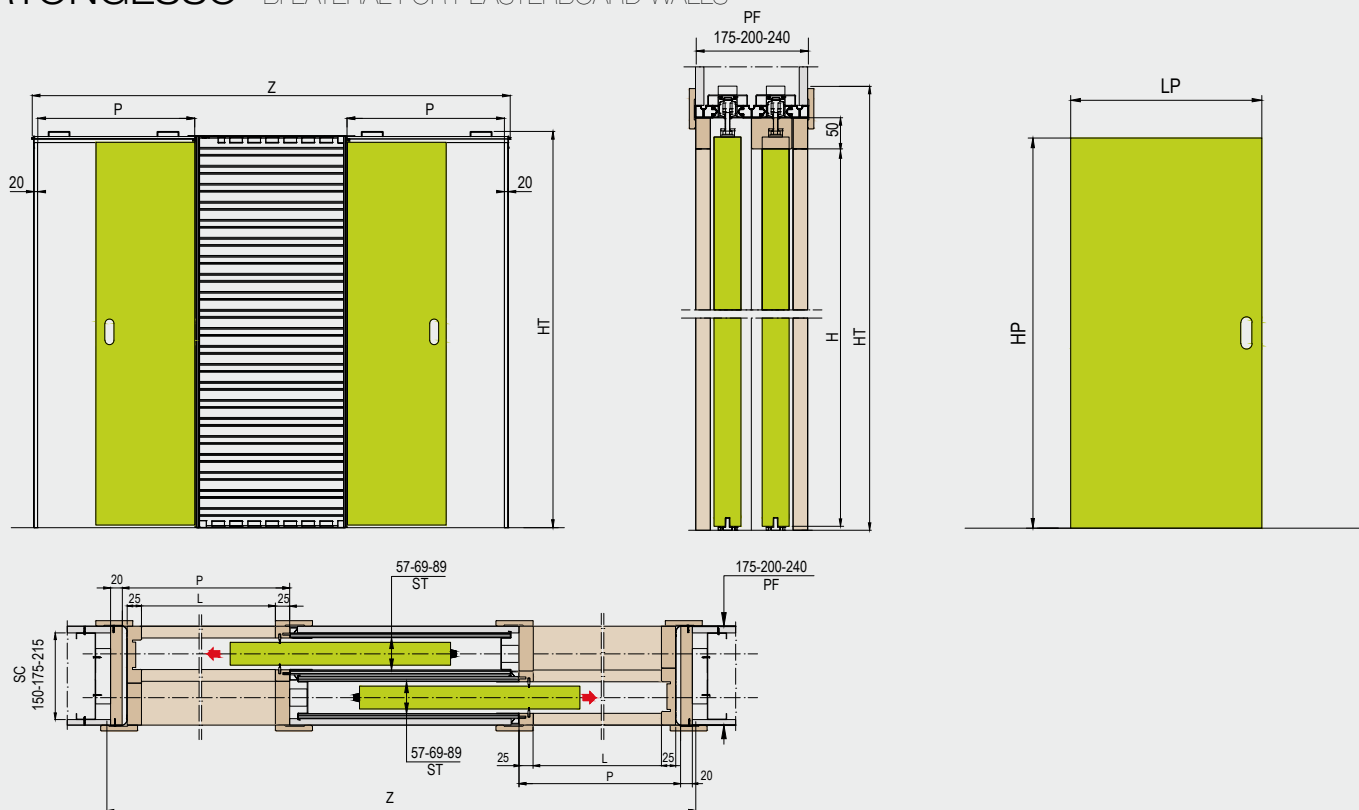

STANDARD

misure in mm - sizes in mm

L x H	Z	HT	P	ST	SC	PF	LP x HP
600+600 x 2000/2030/2100	2040	2100/2140/2200	655	57/69/89	150/175/215	175/200/240	615÷630 x 2010/2040/2110
700+700 x 2000/2030/2100	2340	2100/2140/2200	755	57/69/89	150/175/215	175/200/240	715÷730 x 2010/2040/2110
800+800 x 2000/2030/2100	2640	2100/2140/2200	855	57/69/89	150/175/215	175/200/240	815÷830 x 2010/2040/2110
900+900 x 2000/2030/2100	2940	2100/2140/2200	955	57/69/89	150/175/215	175/200/240	915÷930 x 2010/2040/2110
1000+1000 x 2000/2030/2100	3240	2100/2140/2200	1055	57/69/89	150/175/215	175/200/240	1015÷1030 x 2010/2040/2110
1100+1100 x 2000/2030/2100	3540	2100/2140/2200	1155	57/69/89	150/175/215	175/200/240	1115÷1130 x 2010/2040/2110
1200+1200 x 2000/2030/2100	3840	2100/2140/2200	1255	57/69/89	150/175/215	175/200/240	1215÷1230 x 2010/2040/2110

NOTE TECNICHE

A richiesta sono disponibili altri controtelai a misura speciale con larghezze (L) a partire da 300+300 mm fino a 1500+1500 mm ed altezze (H) a partire da 500 mm fino a 3000 mm.

Le misure intermedie in L e H del controtelaio variano di 50 mm.

Per il controtelaio con struttura (ST) da 57 mm è consigliabile l'utilizzo di pannelli porta con spessore max (SP) di 40 mm, compresi eventuali cornici fermavetro.

Per il fissaggio della lastra in cartongesso sul controtelaio utilizzare le viti in dotazione (o comunque viti di lunghezza non superiore a 19 mm), forando in corrispondenza delle doghe di rinforzo del controtelaio.

Si consiglia l'utilizzo di lastre in cartongesso di 12,5 mm di spessore.

Portata standard dei carrelli in dotazione: 120 kg.

TECHNICAL INFORMATION

Special systems can be produced on demand with the width (L) starting from 300+300 mm up to 1500+1500 mm, and height (H) from 500 mm up to 3000 mm.

Intermediate sizes L and H are available in increments of 50 mm.

Systems with 57 mm structure (ST) are suitable for doors up to 40 mm thick (SP), including panel arch top door. The screws supplied with the system are suitable for the 12,5 mm plaster board. The drilled have to be made in correspondance to the reinforcing boards of the pocket frame. Only screws less than 19 mm should be used with 12,5 mm plaster board.

It is advisable to use plaster boards of 12,5 mm thick.

Standard payload of the hanging kit supplied: 120 kg.