
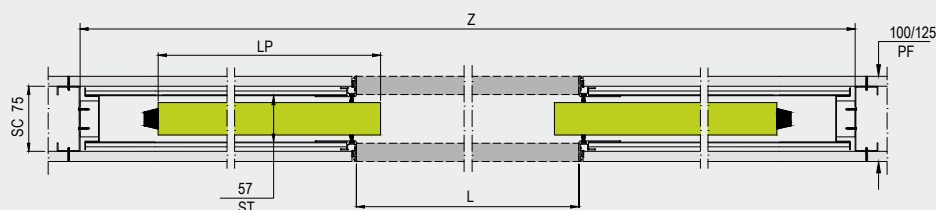
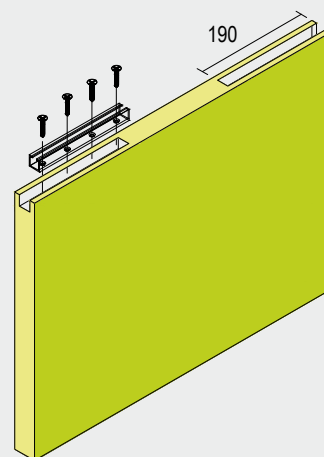
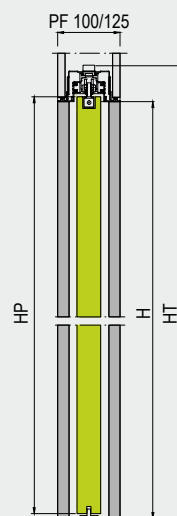


Linear® doppio

CARTONGESSO DOUBLE FOR PLASTERBOARD WALLS

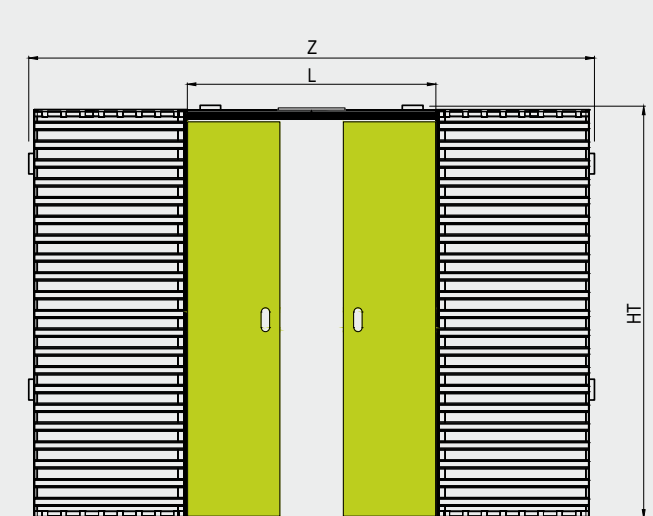

STANDARD

misure in mm - sizes in mm

L x H	Z	HT	ST	SC	PF	LP x HP*
1200 (600+600) x 2000/2035/2100	2530	2080/2120/2180	57	75	100/125	615x1995/2030/2095
1400 (700+700) x 2000/2035/2100	2930	2080/2120/2180	57	75	100/125	715x1995/2030/2095
1600 (800+800) x 2000/2035/2100	3330	2080/2120/2180	57	75	100/125	815x1995/2030/2095
1800 (900+900) x 2000/2035/2100	3730	2080/2120/2180	57	75	100/125	915x1995/2030/2095
2000 (1000+1000) x 2000/2035/2100	4130	2080/2120/2180	57	75	100/125	1015x1995/2030/2095
2200 (1100+1100) x 2000/2035/2100	4530	2080/2120/2180	57	75	100/125	1115x1995/2030/2095
2400 (1200+1200) x 2000/2035/2100	4930	2080/2120/2180	57	75	100/125	1215x1995/2030/2095

NOTE TECNICHE

A richiesta sono disponibili altri controtelai a misura speciale con larghezze (L) a partire da 300+300 mm fino a 1300+1300 mm ed altezze (H) a partire da 500 mm fino a 2700 mm.

Le misure intermedie in L e H del controtelaio variano di 50 mm.

*Le misure fanno riferimento a un pannello porta in legno.

Per ottenere la (PF) di 125 mm bisogna utilizzare la doppia lastra di 12,5 mm.

È consigliabile l'utilizzo di pannelli porta con spessore max (SP) di 40 mm, compresi eventuali cornici fermavetro.

Per l'alloggiamento di pannelli completamente in vetro temprato è necessario il kit Linear® per porte in vetro, (vedi accessori).

Per il fissaggio della lastra in cartongesso sul controtelaio utilizzare le viti in dotazione (o comunque viti di lunghezza non superiore a 19 mm), forando in corrispondenza delle doghe di rinforzo del controtelaio. Si consiglia l'utilizzo di lastre in cartongesso di spessore 12,5 mm.

La dotazione standard comprende guarnizioni e spazzolini di colore bianco.

Portata standard dei carrelli in dotazione: 120 kg.

TECHNICAL INFORMATION

Special systems can be produced on demand with the width (L) starting from 300+300 mm up to 1300+1300 mm, and height (H) from 500 mm up to 2700 mm.

Intermediate sizes L and H are available in increments of 50 mm.

*Dimensions for a wooden door panel.

Use a double 12.5 mm plasterboard for getting (PF) a finished wall of 125 mm.

It is advisable to use doors up to 40 mm thick (SP), including panel arch top door. To instal full glass door panels it is necessary to use the special Linear® kit for glass doors (see accessories).

The screws supplied with the system are suitable for the 12,5 mm plaster board. The drilled have to be made in correspondance to the reinforcing boards of the pocket frame. Only screws less than 19 mm should be used with 12,5 mm plaster board.

It is advisable to use plaster boards of 12,5 mm thick.

The kit with white gaskets and brushes is already supplied.

Standard payload of the hanging kit supplied: 120 kg.