


Mezzo doppio

CARTONGESSO DOUBLE COMPACT FOLDING FOR PLASTERBOARD WALLS

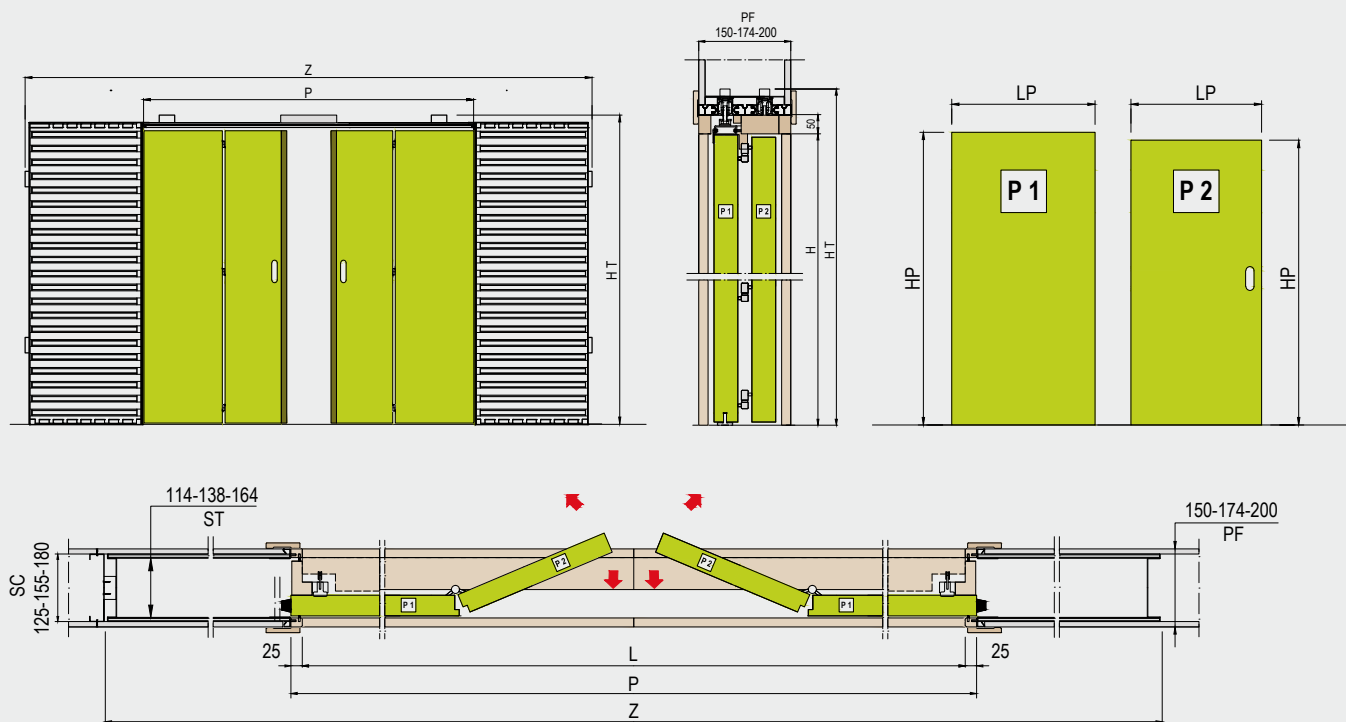

STANDARD

misure in mm - sizes in mm

L x H	Z	HT	P	ST	SC	PF	LP x HP
1200(300x4) x 2000/2100	1930	2120/2220	1250	114/138/164	125/155/180	150/174/200	P1 340 x 1990/2090 P2 300 x 1987/2087
1400(350x4) x 2000/2100	2230	2120/2220	1450	114/138/164	125/155/180	150/174/200	P1 390 x 1990/2090 P2 350 x 1987/2087
1600(400x4) x 2000/2100	2530	2120/2220	1650	114/138/164	125/155/180	150/174/200	P1 440 x 1990/2090 P2 400 x 1987/2087
1800(450x4) x 2000/2100	2830	2120/2220	1850	114/138/164	125/155/180	150/174/200	P1 490 x 1990/2090 P2 450 x 1987/2087
2000(500x4) x 2000/2100	3130	2120/2220	2050	114/138/164	125/155/180	150/174/200	P1 540 x 1990/2090 P2 500 x 1987/2087
2200(550x4) x 2000/2100	3430	2120/2220	2250	114/138/164	125/155/180	150/174/200	P1 590 x 1990/2090 P2 550 x 1987/2087
2400(600x4) x 2000/2100	3730	2120/2220	2450	114/138/164	125/155/180	150/174/200	P1 640 x 1990/2090 P2 600 x 1987/2087

NOTE TECNICHE

A richiesta sono disponibili altri controllelai a misura speciale. Le misure intermedie in L e H del controllelai variano di 50 mm.

La luce nominale (L) è ridotta di circa 20 mm.

Per il controllelai con struttura (ST) da 114 mm è consigliabile l'utilizzo di pannelli porta con spessore max (SP) di 40 mm, compresi eventuali cornici fermavetro.

Per il fissaggio delle lastre in cartongesso sul controllelai utilizzare le viti in dotazione (o comunque viti di lunghezza non superiore a 19 mm) forando in corrispondenza delle doghe di rinforzo del controllelai.

Si consiglia l'utilizzo di lastre in cartongesso di 12,5 mm di spessore.

Portata standard dei carrelli in dotazione: 120 kg.

TECHNICAL INFORMATION

Special systems can be produced on demand.

Intermediate sizes L and H are available in increments of 50 mm.

The doorway (L) is reduced by an approximate 20 mm.

Systems with 114 mm structure (ST) are suitable for doors up to 40 mm thick (SP), including panel arch top door.

The screws supplied with the system are suitable for the 12,5 mm plaster board. The drilled have to be made in correspondance to the reinforcing boards of the pocket frame. Only screws less than 19 mm should be used with 12,5 mm plaster board.

It is advisable to use plaster boards of 12,5 mm thick.

Standard payload of the hanging kit supplied: 120 kg.