


## Mezzo fuori doppio

INTONACO DOUBLE HALF COMPACT FOLDING FOR SOLID WALLS

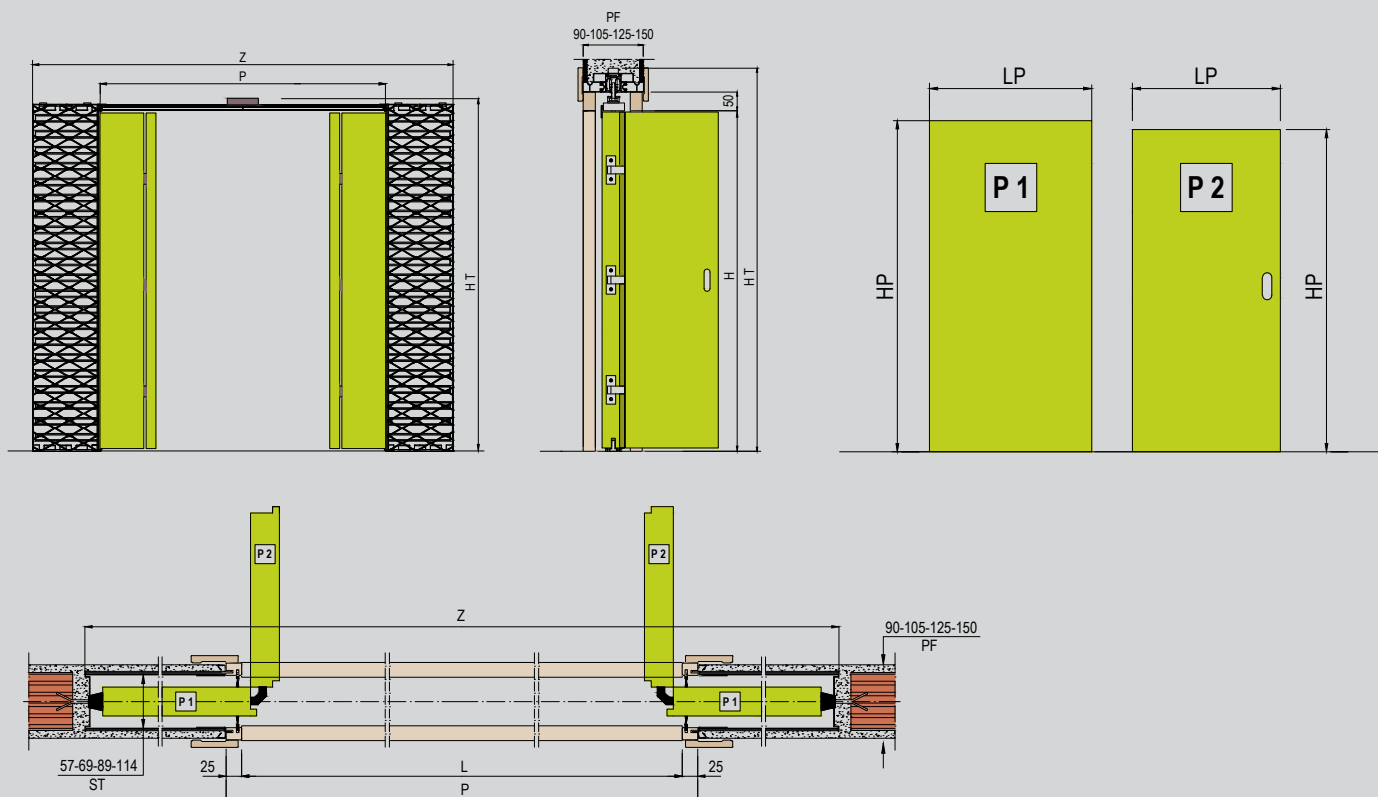

### STANDARD

misure in mm - sizes in mm

L x H	Z	HT	L	P	ST	PF	LP x HP
1200(300x4) x 2000/2100	1930	2120/2220	1250	57/69/89/114	90/105/125/150	P1 340 x 1990/2090 P2 300 x 1987/2087	
1400(350x4) x 2000/2100	2230	2120/2220	1450	57/69/89/114	90/105/125/150	P1 390 x 1990/2090 P2 350 x 1987/2087	
1600(400x4) x 2000/2100	2530	2120/2220	1650	57/69/89/114	90/105/125/150	P1 440 x 1990/2090 P2 400 x 1987/2087	
1800(450x2) x 2000/2100	2830	2120/2220	1850	57/69/89/114	90/105/125/150	P1 490 x 1990/2090 P2 450 x 1987/2087	
2000(500x4) x 2000/2100	3130	2120/2220	2050	57/69/89/114	90/105/125/150	P1 540 x 1990/2090 P2 500 x 1987/2087	
2200(550x4) x 2000/2100	3430	2120/2220	2250	57/69/89/114	90/105/125/150	P1 590 x 1990/2090 P2 550 x 1987/2087	
2400(600x4) x 2000/2100	3730	2120/2220	2450	57/69/89/114	90/105/125/150	P1 640 x 1990/2090 P2 600 x 1987/2087	

### NOTE TECNICHE

A richiesta sono disponibili altri controtelai a misura speciale.  
Le misure intermedie in L e H del controtelaio variano di 50 mm.

La luce nominale (L) è ridotta di circa 100 mm.

Per il controtelaio con struttura (ST) da 57 mm è consigliabile l'utilizzo di pannelli porta con spessore max (SP) di 40 mm, compresi eventuali cornici fermavetro.

Portata standard dei carrelli in dotazione: 120 kg.

### TECHNICAL INFORMATIONS

Special systems can be produced on demand.

Intermediate sizes L and H are available in increments of 50 mm.

The doorway (L) is reduced by an approximate 100 mm.

Systems with 57 mm structure (ST) are suitable for doors up to 40 mm thick (SP), including panel arch top door.

Standard payload of the hanging kit supplied: 120 kg.